


# DBRED LF5 STRIPES

ADHESIVE L PERIMETER STRIPES FOR THE IMPACT SOUND INSULATION

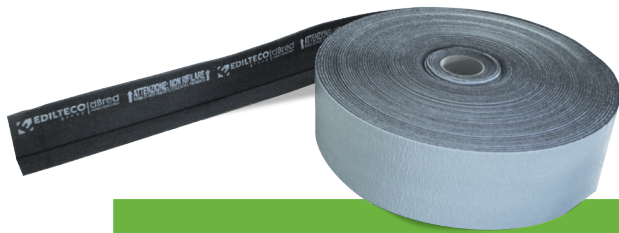

## DBRED LF5 STRIPES

Adhesive L perimeter stripes for the impact sound insulation

DESCRIPTION	Adhesive stripes made of polyethylene foam provided with a hot crease to easier the 'L' folding.				
COMPOSITION	Expanded polyethylene foam with closed-cells.				
COLOUR	White.				
APPLICATION FIELDS	Adhesive stripes composed of hot pre-folded expanded polyethylene foam to make easier the L folding and with silk-screened the application's instructions. Vertical height of 10 or 15 cm in addition to the horizontal height of 5 cm to apply to the mat.				
THICKNESS	5 mm				
PACKAGING	PRODUCT	HEIGHT	ROLL LENGHT	ROLL NR. PER PALLET	QUANTITY PER PALLET
	DBRED LF5 10+5 Super	10+5 cm	50 ml	n° 10	500 ml
	DBRED LF5 15+5 Super	15+5 cm	50 ml	n° 7	350 ml
TECHNICAL CHARACTERISTICS	CHARACTERISTIC			VALUE (NORM)	
	Density:			25 kg/m <sup>3</sup>	
	Thermal conductivity coefficient:			0,035 W/mK	
	Maximum usable temperatures:			-20 °C, +80 °C	
	Impact sound insulation $\Delta L_w$ :			25,5 dB (UNI EN ISO 10140-3)	
	Compression strenght at 10% of deformation:			13,002 kPa (UNI EN 826)	
	Dynamic stiffness:			43,0 MN/m <sup>3</sup> (UNI EN 29052-1)	

All the indications provided in this technical data sheet are purely approximate and not binding for legal purposes. The data listed has been gathered from laboratory tests and it hence follows that in practical applications on buildings sites the final characteristics of the products may be subject to substantial variations depending on the meteorological conditions and the installations. The user must always check suitability of the product for its specific use, undertaking all liability implicit in and deriving from use of the product, as well as comply with all the methods and instructions for use generally referable to "workmanlike" execution. Edilteco S.p.A. reserves the right to change the contents of this technical data sheets on its final judgements. The spreading of this data sheet through any media, supersedes and cancels the validity of any other technical data sheet previously published.



dBred Noise Reduction Division

DS FASCE DBRED LF5 . Rev 09/2016 . GB



Edilteco S.p.A. Via dell'Industria, 710 . 41038 San Felice sul Panaro (MO) Italy  
Tel. +39 0535 82161 . Fax +39 0535 82970 . [www.edilteco.com](http://www.edilteco.com) | [info@edilteco.com](mailto:info@edilteco.com)



COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =