


Electrical power supply

POLITERM[®] MACHINE SCREW

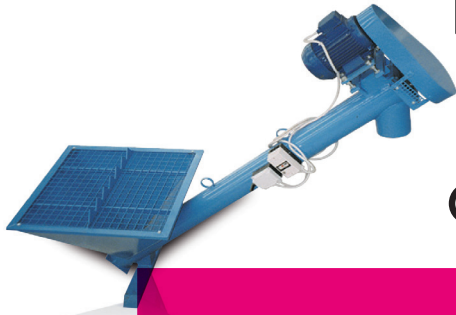

SCREW FOR CEMENT LOADING

POLITERM[®] MACHINE SCREW Screw for cement loading

TYPE OF EQUIPMENT	Equipment for the mechanical loading of cement into the Politerm [®] Machine tank.	
TECHNICAL CHARACTERISTICS	Electrical power supply:	400 V
	Power of the engine:	2,2 kW
	Voltage:	380 V 50 Hz three phase + earth
	Speed:	260 turns/min
	Loading height:	80 cm
	Hopper capacity:	Approx. 150 kg. of cement
DIMENSIONS	External Ø:	16 cm
	Screw length:	220 cm
	Final packaging size:	260 x 100 cm
	Weight:	Approx. 120 kg
STANDARD EQUIPMENT	<ul style="list-style-type: none"> · 10 m of cable with three phases socket + earth 32A. · Use and maintenance manual. · CE Conformity declaration. 	

All the indications provided in this technical sheet are purely approximate and not binding for legal purpose. The data listed has been gathered from laboratory test and it hence follows that in practical applications on building sites the final products may be subject to variations depending on meteorological conditions and the installation. The user must always check suitability of the product for its specific use, undertaking all liability implicit in and deriving from use of the product, as well as comply with all methods and instruction for use generally referable to "workmanlike" execution. Edilteco S.p.A reserves the right to change the contents of this mechanical data sheet on its final judgment. The spreading of this data sheet through any media, supersedes and cancels the validity of any other technical data sheet previously published.



E&MP Engineering Machines Plants Division

DS POLITERM[®] MACHINE SCREW . Rev 08/2018 . GB



Edilteco S.p.A. Via dell'Industria, 710 . 41038 San Felice sul Panaro (MO) Italy
Ph. +39 0535 82161 . Fax +39 0535 82970 . www.edilteco.com | info@edilteco.com

© Copyright EDILTECO S.p.A. - Non authorized reproduction is forbidden.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =